



Description

3-piston alternating volumetric pumps for use on cleaning units and industrial systems. Can be directly coupled to various types of motors. Pump body in die-cast aluminium alloy. Side cover may be blind or incorporate oil sight glass (optional). Pistons driven by crank-connecting rod mechanism. Pump shaft high-strength steel. Oversized friction bearings. Connecting rods in die-cast special low-friction zinc-aluminium alloy. Pistons in ceramic-coated stainless steel. Pump head in pressed brass. Double gasket sealing system. Intake and delivery valves have plugs for easier maintenance. Regulator valves built-in to the pump head, with detergent injector.

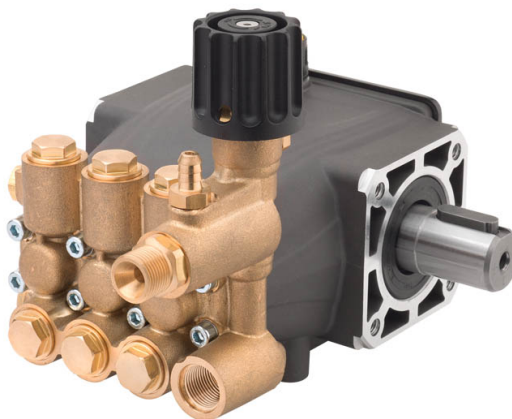

Details	Value
Category	Cleaning
Series	414
Pump type	JRS 14.15 N
Versioning	JRS
ARCode	26441
Output (lt/min)	14
Output (gpm)	3,7
Pressure (bar)	150
Pressure (psi)	2200
Power (hp)	5,25
Power (kw)	3,9
RPM	2800
Weight (kg)	4

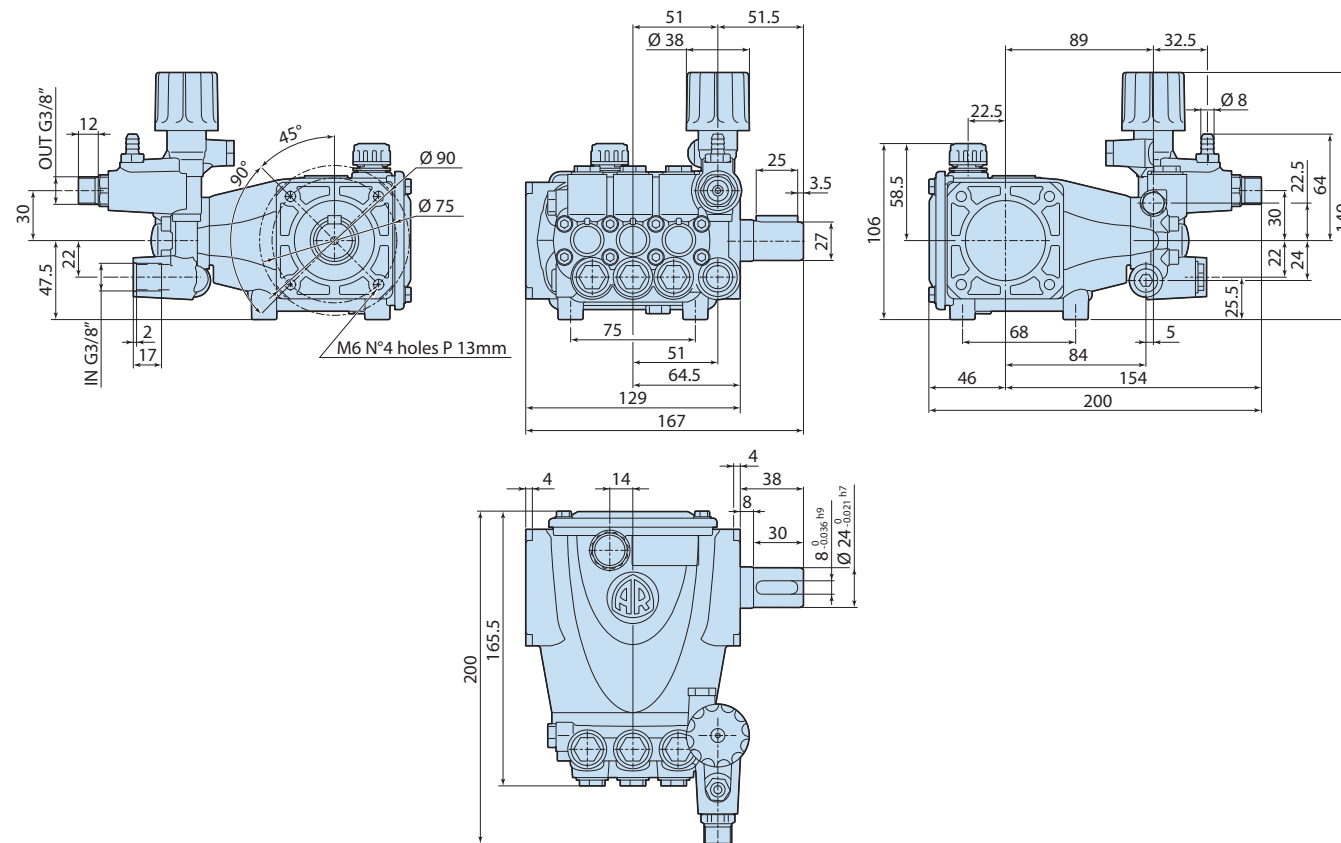

4148500