

Description

3-piston alternating volumetric pumps for use on cleaning units and industrial systems.

Can be coupled to various types of motors, directly or with flexible joint.

Pump body in die-cast aluminium alloy with oil drain outlet.

Rear cover in die-cast aluminium alloy.

Pistons driven by crank-connecting rod mechanism.

Pump shaft in pressed high-strength steel.

Oversized friction bearings.

Connecting rods in die-cast special low-friction zinc-aluminium alloy.

Pistons in ceramic-coated stainless steel .

Pump head in pressed brass.


Double gasket sealing system.

Intake and delivery valves have plugs for easier maintenance.

Integral regulating valve.



| Details | Value |
|-----------------|-------------|
| Category | Cleaning |
| Series | 276 |
| Pump type | RSS 15.15 N |
| Versioning | N |
| ARCode | 23182 |
| Output (lt/min) | 15 |
| Output (gpm) | 3.96 |
| Pressure (bar) | 150 |
| Pressure (psi) | 2200 |
| Power (hp) | 5.5 |
| Power (kw) | 4 |
| RPM | 2800 |
| Weight (kg) | 7 |

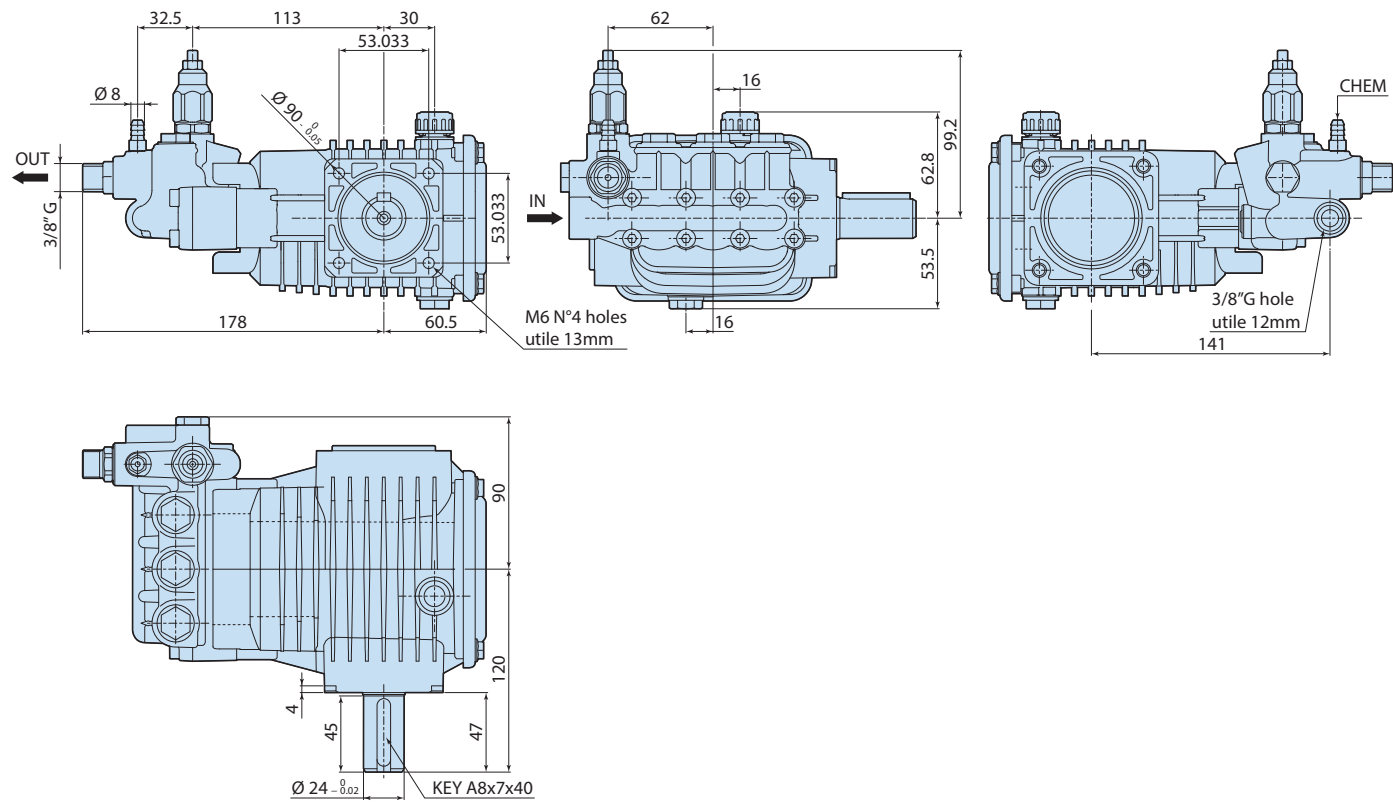

2768515