





Description

3-piston alternating volumetric pumps for use on cleaning units and industrial systems. Can be coupled to various types of motors, directly or with flexible joint.

Pump body in die-cast aluminium alloy. Side cover may be blind. Pistons driven by crank-connecting rod mechanism. Pump shaft in pressed high-strength steel. Oversized friction bearings. Connecting rods in die-cast special low-friction zinc-aluminium alloy. Bronze connecting rods available. Pump head in pressed brass. Double gasket sealing system. Delivery valves have plugs for easier maintenance. Regulator valves built-in to the pump head, with detergent injector.

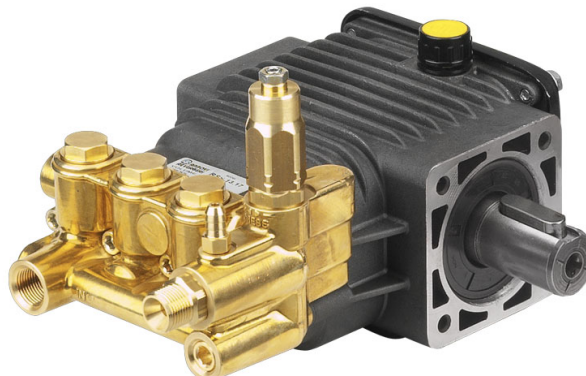

Details	Value
Category	Cleaning
Series	276 - RS, RSS, RSV
Pump type	RS 13.17 N
Versioning	N
ARCode	23160
Output (lt/min)	13
Output (gpm)	3.43
Pressure (bar)	170
Pressure (psi)	2500
Power (hp)	5.5
Power (kw)	4
RPM	1450
Weight (kg)	7

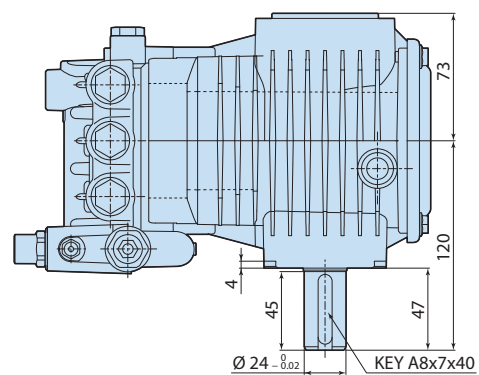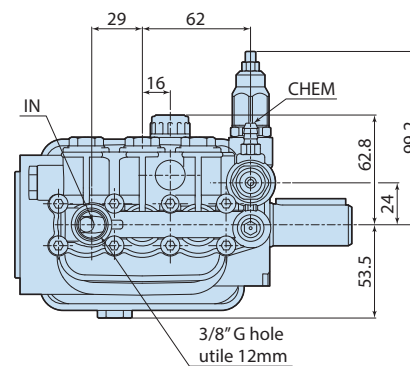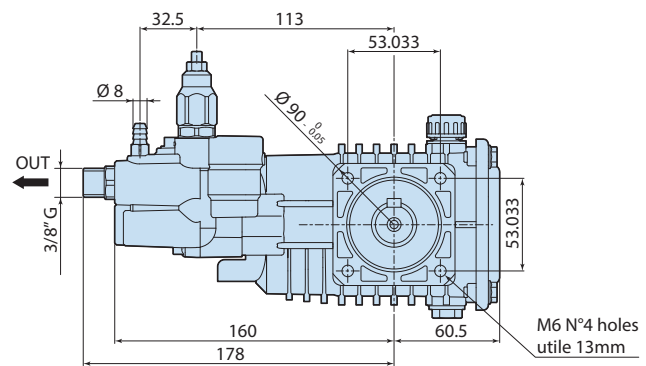

2768525