

## Description

3-piston alternating volumetric pumps for use on cleaning units and industrial systems.

Can be coupled to various types of motors, directly or with flexible joint.

Pump body and cover in die-cast aluminium alloy.

Side cover may be blind or incorporate oil sight glass.

Rear cover with oil drain outlet.

Pistons driven by crank-connecting rod mechanism.

Pump shaft in pressed high-strength steel.

Oversized friction bearings.

Connecting rods in die-cast special low-friction zinc-aluminium alloy.

Bronze connecting rods available.

One-piece ceramic pistons.



Pump head in pressed brass or steel.

Double gasket sealing system.

Intake and delivery valves have plugs for easier maintenance.



Details	Value
Category	Electric motor-pump units
Series	366
Pump type	HRTX 30.300 ET
Versioning	HRTX
ARCode	25344
Output (lt/min)	30
Output (gpm)	7,92
Pressure (bar)	300
Pressure (psi)	4350
Power (hp)	25
Power (kw)	18,6
RPM	1450
Weight (kg)	135

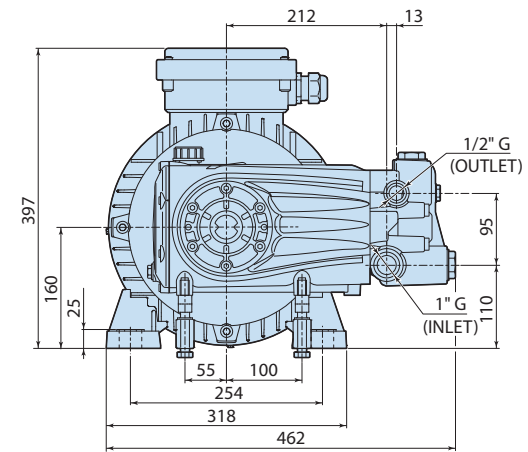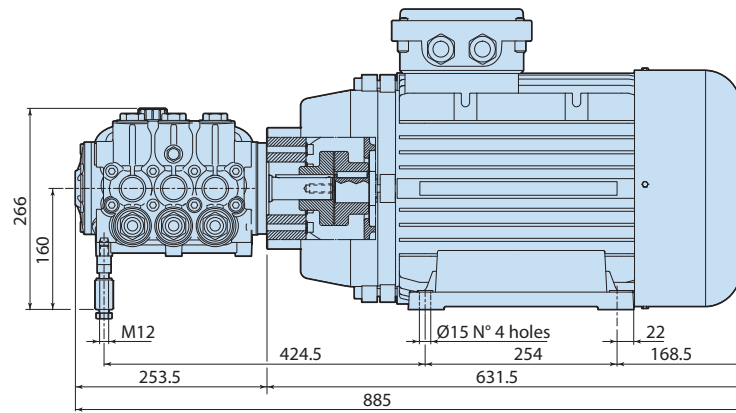

3668501