

Description

3-piston alternating volumetric pumps for use on cleaning units and industrial systems.

Can be coupled to various types of motors, directly or with flexible joint.

Pump body and cover in die-cast aluminium alloy.

Side cover incorporate oil sight glass. Oil level on pump body.

Rear cover with oil drain outlet.

Pistons driven by crank-connecting rod mechanism.

Pump shaft in pressed high-strength steel.

Oversized friction bearings.

Connecting rods in die-cast special low-friction zinc-aluminium alloy.

One-piece ceramic pistons.





Pump head in pressed brass.

Double gasket sealing system.

Intake and delivery valves have plugs for easier maintenance.



Details	Value
Category	Cleaning
Series	322 - RR, RRA, RRV
Pump type	RR 15.20 N
Versioning	N
ARCode	23507
Output (lt/min)	15
Output (gpm)	3.96
Pressure (bar)	200
Pressure (psi)	2900
Power (hp)	7.5
Power (kw)	5,5
RPM	1450
Weight (kg)	7,6

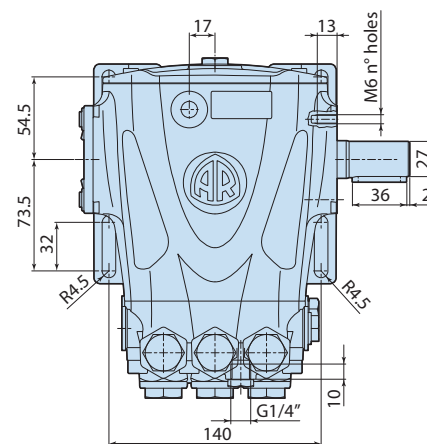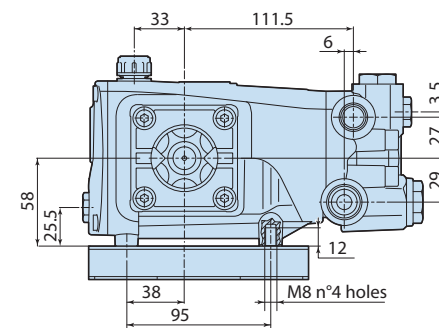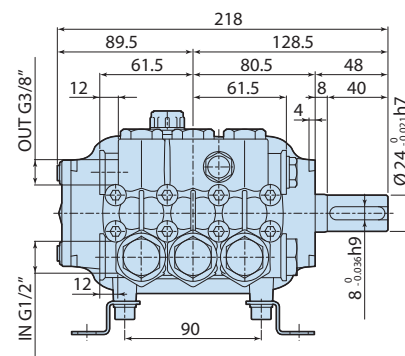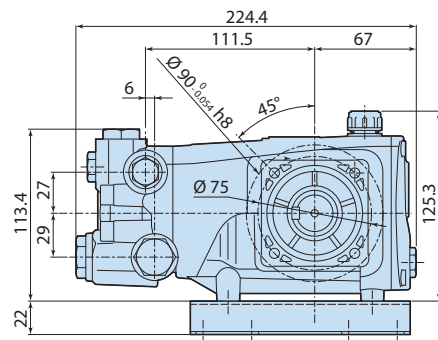

3228500