


Description

3-piston alternating volumetric pumps for use on cleaning units and industrial systems. Hollow shaft pump version for electric motors NEMA 182-184, 4 poles 60 Hz, flange F17 non included. Pump body and cover in die-cast aluminium alloy. Rear cover with oil drain outlet and oil sight glass. Cap with dipstick for oil level on body pump. Pistons driven by crank-connecting rod mechanism. Pump shaft in pressed high-strength steel. Oversized friction bearings. Connecting rods in die-cast special low-friction zinc-aluminium alloy. One-piece ceramic pistons. Pump head in pressed brass. Double gasket sealing system. Intake and delivery valves have plugs for easier maintenance.



| Details | Value |
|-----------------|--------------------|
| Category | Cleaning |
| Series | 228 - RK, RKA, RKV |
| Pump type | RKA 7 G13 E |
| Versioning | E |
| ARCode | 20685 |
| Output (lt/min) | 27 |
| Output (gpm) | 7.1 |
| Pressure (bar) | 90 |
| Pressure (psi) | 1300 |
| Power (hp) | 6.5 |
| Power (kw) | 4,7 |
| RPM | 1750 |
| Weight (kg) | 9 |

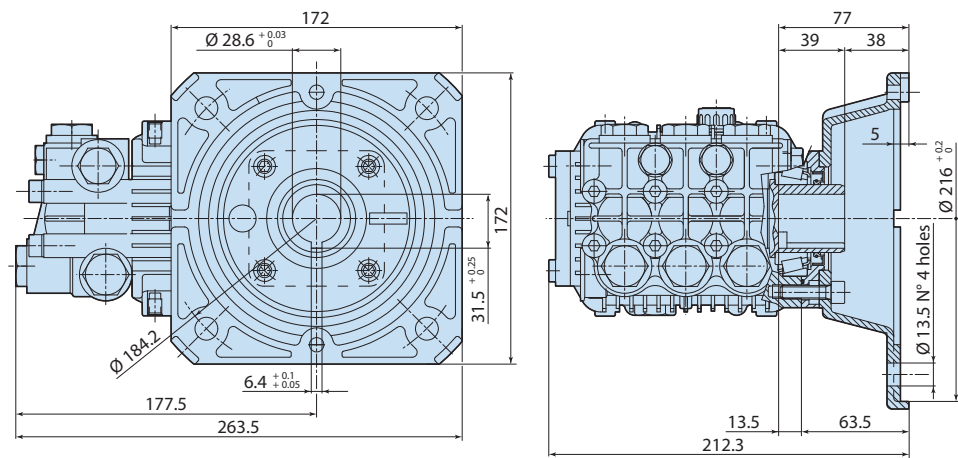

1388521-B