




Description

3-piston reciprocating pumps for use on cleaning units and industrial systems requiring a higher level of protection against corrosion and oxidation." Pump body, end plate and side covers in die-cast aluminium with protective electro-phoresis coating. Head machined from solid AISI 316L steel block for resistance to saline and acid environments. Pistons driven by crank-connecting rod mechanism. Connecting rods in bronze. Double gasket sealing system to minimise any water leaks. Shaft in heat-treated pressed steel for excellent mechanical strength. Oversized friction bearings. One-piece ceramic pistons. Motor Sauer Danfoss, type SNM2NN/019 BN06GAM1F5F5N code 4769.

On request available Hydraulic Motor type: Casappa - Marzocchi.

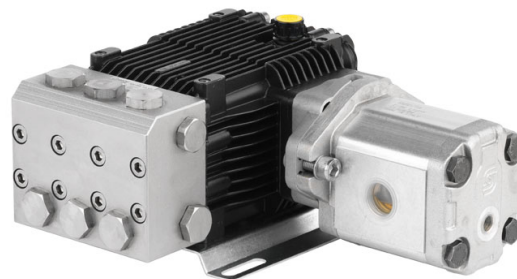

Details	Value
Category	Stainless Steel
Series	234 - RK-SS, RKA-SS, HYD RK-SS
Pump type	HYD RK-SS 21.15
Versioning	HYD
ARCode	21965
Output (lt/min)	21
Output (gpm)	5,55
Pressure (bar)	150
Pressure (psi)	2200
Power (hp)	7,5
Power (kw)	5,5
RPM	1450
Weight (kg)	13,5

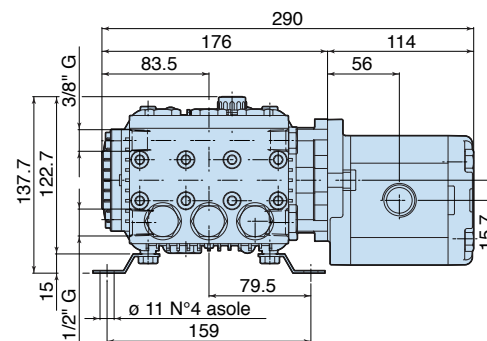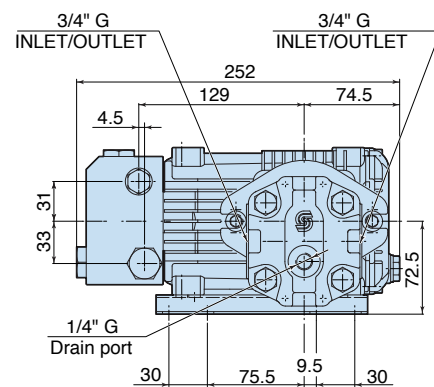

2348504