

Description

3-piston alternating volumetric pumps for use on cleaning units and industrial systems.

Can be coupled to various types of motors, directly or with flexible joint.

Pump body in die-cast aluminium alloy with oil drain outlet.

Rear cover in die-cast aluminium alloy.

Pistons driven by crank-connecting rod mechanism.

Pump shaft in pressed high-strength steel.

Oversized friction bearings.

Connecting rods in die-cast special low-friction zinc-aluminium alloy.

Pistons in ceramic-coated stainless steel .

Pump head in pressed brass.


Double gasket sealing system.

Intake and delivery valves have plugs for easier maintenance.

Integral regulating valve.



Details	Value
Category	Cleaning
Series	276
Pump type	RSS 13.17 N
Versioning	N
ARCode	23949
Output (lt/min)	13
Output (gpm)	3.43
Pressure (bar)	170
Pressure (psi)	2500
Power (hp)	5.5
Power (kw)	4
RPM	2800
Weight (kg)	7

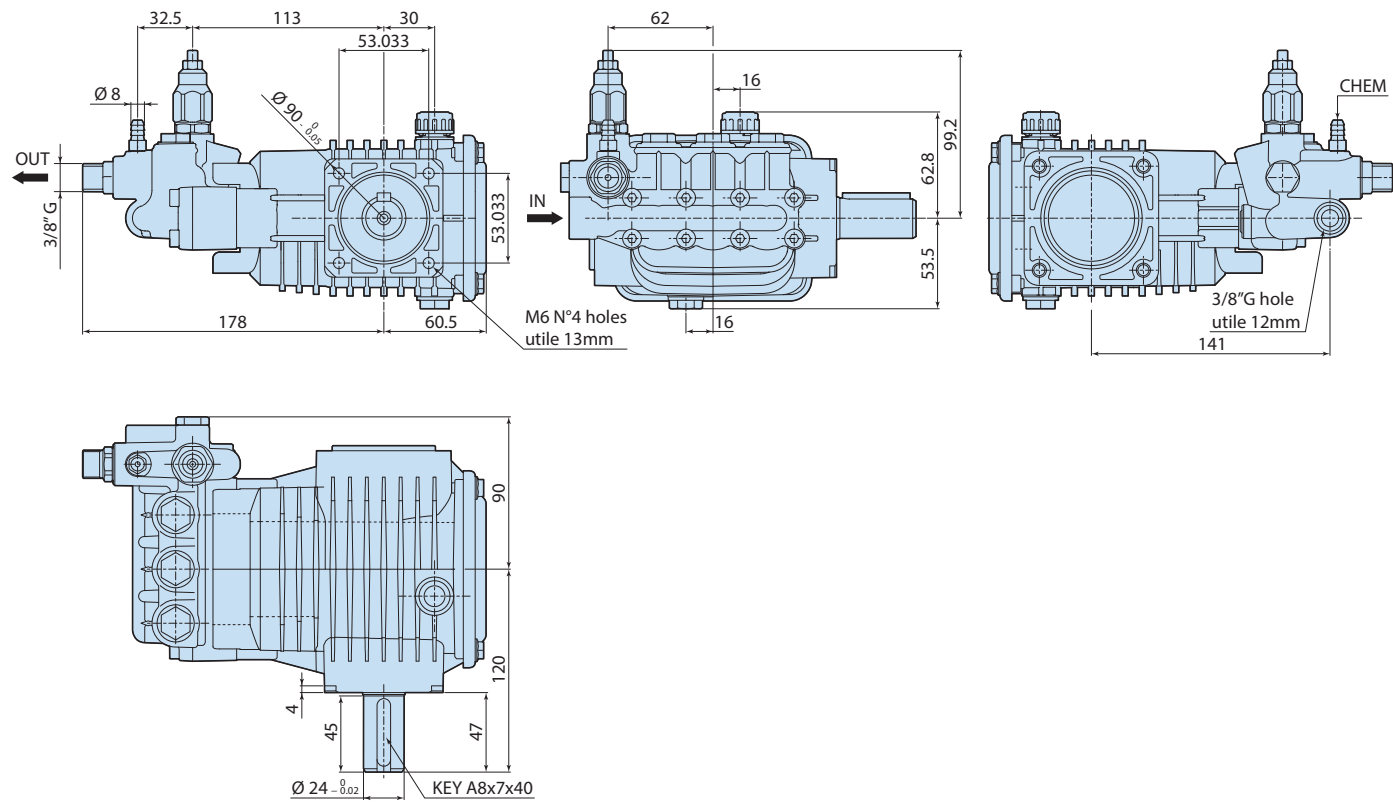

2768515