

## Description

3-piston alternating volumetric pumps for use on cleaning units and industrial systems.

Can be coupled to various types of motors, directly or with flexible joint. Flange for gasoline engine ø1" SAE J609a included.

Pump body in die-cast aluminium alloy with oil drain outlet.

Rear cover in die-cast aluminium alloy.

Pistons driven by crank-connecting rod mechanism.

Pump shaft in pressed high-strength steel.

Oversized friction bearings.

Connecting rods in bronze.


Pistons in ceramic-coated stainless steel .

Pump head in pressed brass.

Double gasket sealing system.

Intake and delivery valves have plugs for easier maintenance.

Integral regulating valve.

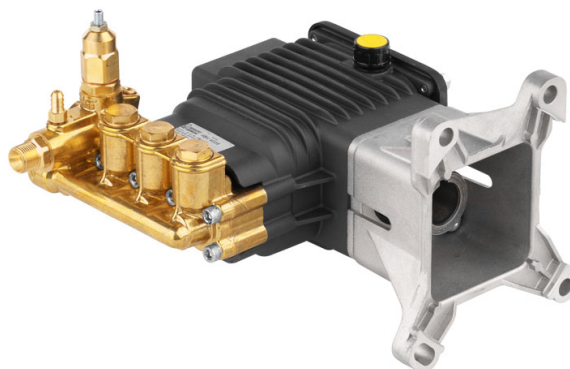

Details	Value
Category	Cleaning
Series	276 - RS, RSS, RSV
Pump type	RSV 4G35 D+F40
Versioning	D
ARCode	21792
Output (lt/min)	15.1
Output (gpm)	4
Pressure (bar)	240
Pressure (psi)	3500
Power (hp)	10
Power (kw)	7,5
RPM	3400
Weight (kg)	7.5

