

## Description

3-piston alternating volumetric pumps for use on cleaning units and industrial systems.

Can be coupled to various types of motors, directly or with flexible joint.

Pump body and cover in cast iron.

Rear cover with oil drain outlet and sight glass.

Pistons driven by crank-connecting rod mechanism.

Pump shaft in pressed high-strength steel.


Oversized friction bearings.

Bronze connecting rods.




Ceramic pistons.

Pump head in nichel-plated brass.



Double gasket sealing system.

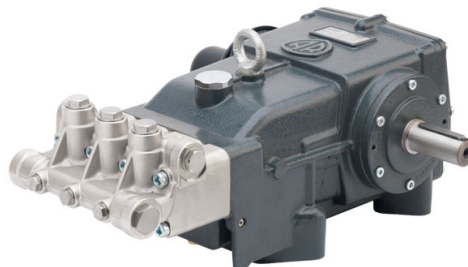


Details	Value
Category	Contractor 600
Series	282 - RTP, RTJ, RTF
Pump type	RTP 30.500
Versioning	N AP
ARCode	22215
Output (lt/min)	30
Output (gpm)	7.92
Pressure (bar)	500
Pressure (psi)	7250
Power (hp)	40
Power (kw)	30
RPM	1000
Weight (kg)	78

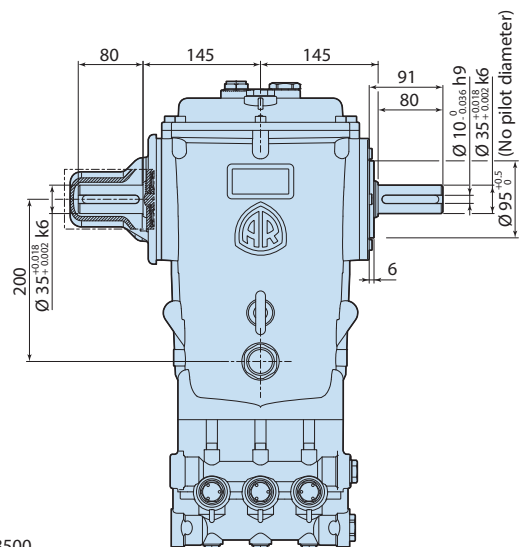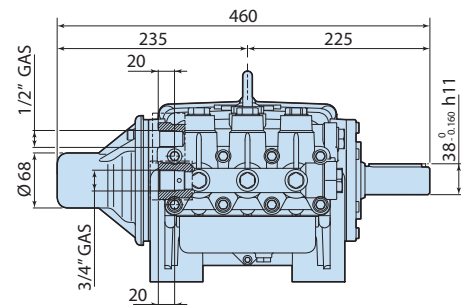

Sez. Parz. B-B

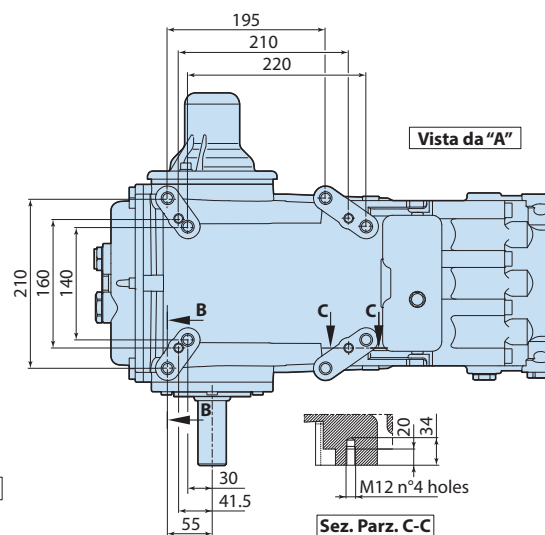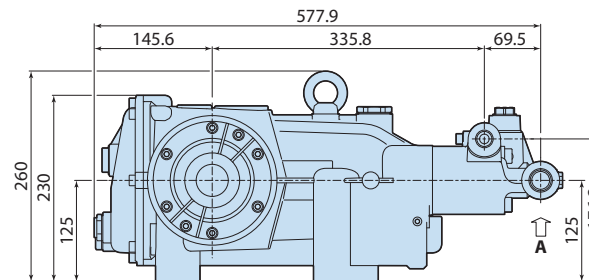

Vista da "A"



Sez. Parz. C-C

2828500