

Poly Series

Poly 2180



170 l/m
44.9 USGPM



max 15 BAR
218 P.S.I.

APPLICAZIONI - APPLICATIONS



SPRAYER
SPRAYER



TRAVASI
TRANSFERS



DISINFESTAZIONE
DISINFESTATION


MEMBRANE - MEMBRANES



DESMOPAN

HPS

VITON

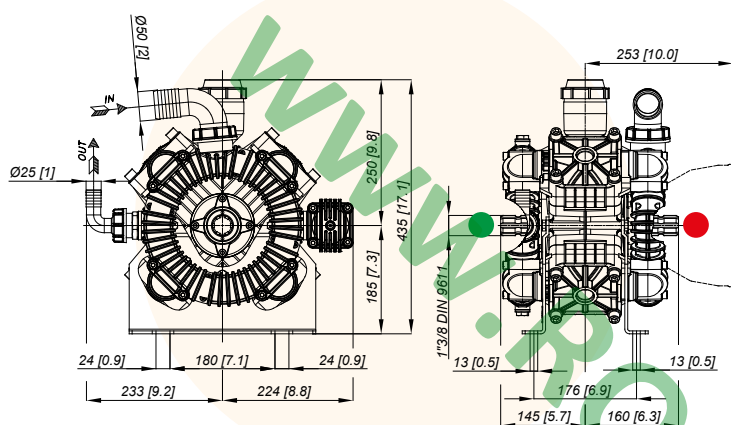

CARATTERISTICHE TECNICHE SPECIFICATIONS		550 g/min. 550 R.P.M.		TABELLA RENDIMENTI PERFORMANCE CHART							
Potenza - Power	4,9 KW	6.5 HP		g/min R.P.M.	400	450	500	550			
Peso - Weight	26 Kg	57.2 lb		BAR P.S.I.	L/min USGPM	KW HP	L/min USGPM	KW HP	L/min USGPM	KW HP	L/min USGPM
IN	Ø 45 mm	Ø 1" 3/4 in									
Pressione Min - Min Pressure	-0,15 BAR	- 2.17 P.S.I.									
	-0,3 BAR (servizio discontinuo)	-0.435 P.S.I. (discontinuous service)									
Pressione Max - Max Pressure	1 BAR	14.5 P.S.I.									
OUT	Ø 25 mm	Ø 1" in									
Max. Temperatura - Max. Temperature	60 °C	140 °F									
Tipo olio - Oil type	SAE 30										
Capacità olio - Oil capacity	2,1 lt	0.55 U.S.G.									

Versioni Versions

28.9220.97.3DS - VD

28.9267.97.3DS - VC

28.9272.97.3DS - VS



Anteriore/Front

Posteriore/Rear

Anteriore/Front

Posteriore/Rear

Anteriore/Front

